


MODEL PGM

ÇİFT ETKİLİ YASTIKLI MANYETİK PNÖMATİK SİLİNDİRLER ISO 6431
DOUBLE ACTING MAGNETIC PNEUMATIC CYLINDERS
WITH CUSHIONS, ISO 6431

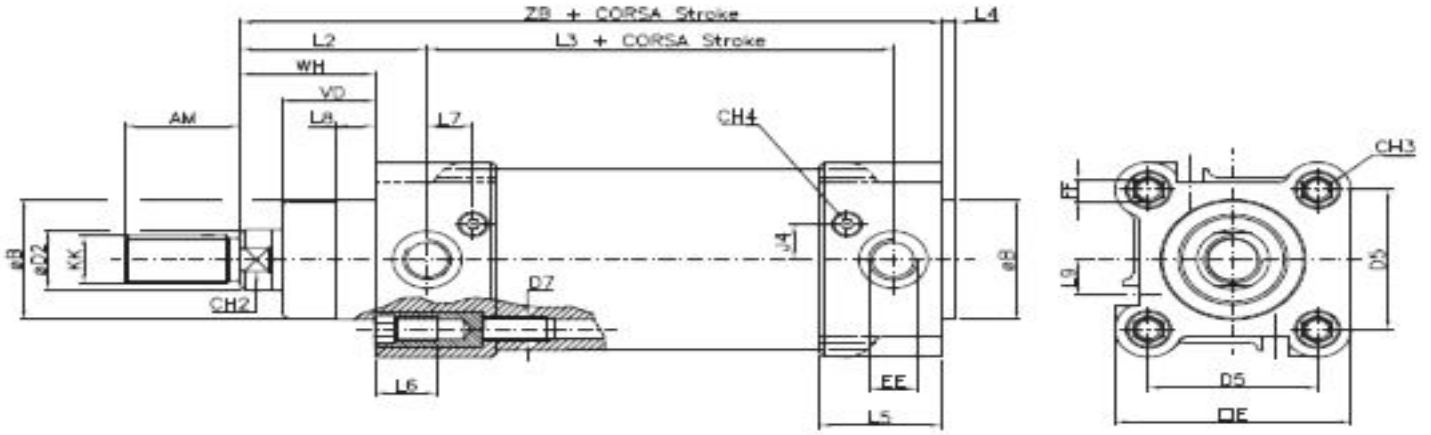

BOYUTLAR / SIZES

Ø mm	AM	Ø B	Ø D2	D5	D7	EE	E	J4	KK	L2	L3	L4	L5	L6	L7	L8	L9	CH2	CH3	CH4	VD	WH	ZB	FF
32	22	30	12	32.5	M6	1/8"G	48	6	M10X1.25	39.5	67	4	30.8	15	11	9	5.7	10	6	3	18	26	121	M6
40	24	35	16	38	M6	1/4"G	54	8.5	M12X1.25	44	77	4	33	15	13	9	8.5	13	6	3	22	30	135	M6
50	32	40	20	46.5	M8	1/4"G	65	11.8	M16X1.5	51	78	4	33.7	21.5	12.7	9	11.8	16	8	3	25.5	37	143	M8
63	32	45	20	56.5	M8	3/8"G	75.2	11.7	M16X1.5	53	89	4	38	21.5	15.5	9	15.9	16	8	3	25	37	158	M8
80	40	45	25	72	M10	3/8"G	94	15.5	M20X1.5	62	96	4	40	24	16	9	16	21	10	4	35	46	174	M10
100	40	55	25	89	M10	1/2"G	111	15.5	M20X1.5	69	102	4	43.5	24	15.5	9	22	21	10	4	38	51	189	M10
125	54	60	32	110	M12	1/2"G	139	19	M27X2	83	124	6	53.2	22	25	11	23.7	27	12	4	46	65	225	M12

ÇAPA GÖRE STROK SEÇİMİ
TO CHOOSE STROKE AS PER DIA. OF PNEUMATIC CYLINDER

Ø/mm	25	50	80	100	125	150	160	200	250	300	400
32
40
50
63
80
100