


ALÜMİNYUM YAĞ SEVİYE GÖSTERGESİ ALUMINIUM OIL LEVEL INDICATOR

MODEL P-SG



SPESİFİK DEĞERLER / SPECIFIC VALUES	
ALTİGEN GÖVDE / HEX. BODY	11S ALÜMİNYUM / ALUMINIUM
GÖZETLEME CAMI SIGHT GLASS	TRANSPARAN POLİAMİD TRANSPARENT POLYAMİD
MAX ÇALIŞMA BASINCI MAX. OPERATING PRESSURE	10 BAR
ÇALIŞMA SICAKLIĞI OPERATING TEMPERATURE	100°C
AKIŞKAN / FLUID	MİNERAL YAĞLAR / MINERAL OILS

KOD CODE	G	A	B	C	CH
P-SG-014	1/4"	11	15.5	8	18
P-SG-038	3/8"	12	17	8	22
P-SG-012	1/2"	15	17	8	27
P-SG-034	3/4"	19	20	9	34
P-SG-0001	1"	27	21.5	10.5	40
P-SG-114	1 1/4"	32	24.5	13	50

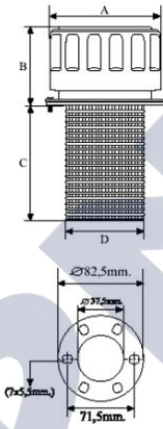

P-DK SERİSİ HİDROLİK DEPO DOLUM VE HAVALANDIRMA KAPAĞI P-DK SERIES HYDRAULIC TANK TYPE FILLER BREATHER

MODEL P-DK



SPESİFİK DEĞERLER / SPECIFIC VALUES	
KONSTRÜKSİYON CONSTRUCTION	ELEKTROSTATİK TOZ BOYALI SAÇ KAPAK, GALVANİZ KAPLI DEPO MONTAJ FLANŞI VE İÇ PARÇALAR / ELECTROSTATIC POWDER PAINTED SHEET BONNET , GALVANIZE PLATED TANK INSTALATION FLANGE AND INTERNAL COMPONENTS .
FİLTASYON ARALIĞI FILTRATION RANGE	40 MICRON
DOLUM FİLTRESİ FILING FILTER	NAYLON / NYLON 66

KOD CODE	AÇIKLAMA DESCRIPTION	A	B	C	D
P-DK-045	STANDART TİP STANDARD TYPE	77	57	80	49