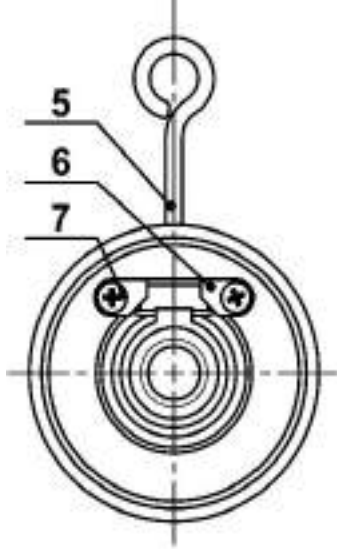


NO	PARÇA ADI / PART NAME	NST16C- 304	NST16C- 316
1	GÖVDE / BODY	SS304	SS316
2	KLAPE / FLAP	SS 304	SS 316
3	O-RİNG / O-RING	EPDM/VITON	EPDM/VITON
4	DIŞ O'RİNG / EXTERNAL O-RING	VITON	VITON
5	KANCA / HOOK	STEEL	STEEL
6	MİL DURDURUCUSU / SHAFT STOPPER	SS304	SS316
7	AKS VİDASI / AXIS SCREW	SS304	SS316

KULLANILABİLİR SIVILAR : SU,SICAK SU VE DENİZ SUYU
APPLICABLE FLUIDS : WATER,HOT WATER AND SEA WATER.

MAX.ÇALIŞMA ŞARTLARI / MAX.OPERATING CONDITIONS

ÇALIŞMA BASINCI / OPERATING PRESSURE	10 Bar
ÇALIŞMA SICAKLIĞI / OPERATING TEMPERATURE (EPDM)	100°C
MAX.TEST BASINCI / MAX.TEST PRESSURE	16 Bar

ÖLÇÜ / SIZE	L	D	AĞIRLIK / WEIGHT KGS
DN32	12	82	0.62
DN40	12	92	0.71
DN50	14	105	0.85
DN65	14	124	1.15
DN80	14	136	1.34
DN100	18	164	2.30
DN125	18	194	3.10
DN150	20	220	4.40
DN200	22	275	7.10
DN250	26	330	12.00
DN300	30	384	20.50