


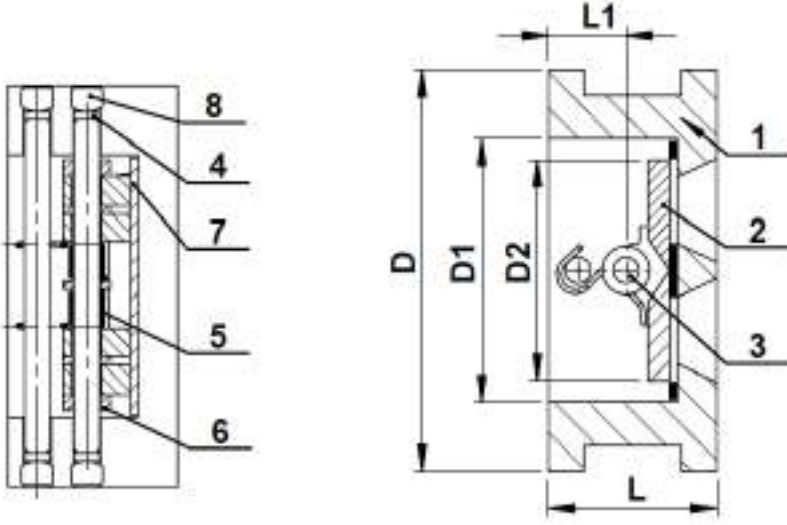

| NO: | MALZEME / MATERIAL           | NST-2K                         | NST-22K                           |
|-----|------------------------------|--------------------------------|-----------------------------------|
| 1   | GÖVDE / BODY                 | PASLANMAZ ÇELİK / SS 304 / 316 | PİK DÖKÜM / GG 25                 |
| 2   | KLAPE / FLAP                 | PASLANMAZ ÇELİK / SS 304 / 316 | NİKEL KAPLI / NICKEL COATED GGG40 |
| 3   | MİL / SHAFT                  | PASLANMAZ ÇELİK / SS 304 / 316 | PASLANMAZ ÇELİK / SS 304 / 316    |
| 4   | KAUÇUK TAPA / RUBBER PLUG    | NBR                            | NBR                               |
| 5   | YAY / SPRING                 | PASLANMAZ ÇELİK / SS304        | PASLANMAZ ÇELİK / SS304           |
| 6   | TUTUCU DIŞ / RETAINER THREAD | KARBON ÇELİK / CARBON STEEL    | KARBON ÇELİK / CARBON STEEL       |
| 7   | KLAPE YATAĞI / DISC SEAT     | PTFE                           | PTFE                              |
| 8   | SETUSKUR / SET SCREW         | PASLANMAZ ÇELİK / SS 304 / 316 | PASLANMAZ ÇELİK / SS 304 / 316    |

| ÖLÇÜ / SIZE | L   | L1 | D       | D1  | D2    | AĞIRLIK / WEIGHT<br>KGS |
|-------------|-----|----|---------|-----|-------|-------------------------|
| DN40        | 43  | 19 | 107     | 65  | 43,3  | 1,50                    |
| DN50        | 43  | 19 | 107     | 65  | 43,3  | 1,50                    |
| DN65        | 46  | 20 | 127     | 80  | 60,2  | 2,40                    |
| DN80        | 64  | 28 | 142     | 94  | 66,4  | 3,60                    |
| DN100       | 64  | 27 | 162     | 117 | 90,8  | 5,70                    |
| DN125       | 70  | 30 | 192     | 145 | 116,9 | 7,30                    |
| DN150       | 76  | 31 | 218     | 170 | 144,6 | 9,0                     |
| DN200       | 89  | 33 | 273     | 224 | 198,2 | 17                      |
| DN250       | 114 | 50 | 328     | 265 | 233,7 | 26                      |
| DN300       | 114 | 43 | 378     | 310 | 283,9 | 42                      |
| DN350       | 127 | 45 | 438     | 360 | 332,9 | 55                      |
| DN400       | 140 | 52 | 489     | 410 | 381   | 75                      |
| DN450       | 152 | 58 | 539/555 | 450 | 419,9 | 104/107                 |
| DN500       | 152 | 58 | 594     | 505 | 467,8 | 111                     |

SIZDIRMAZLIK / SEALING

AÇMA BASINCI / OPENING PRESSURE 0,5 Bar




ELASTİK CONTALI  
ELASTIC GASKET

METAL  
METAL

METAL KAPLAMALI  
METAL COATED

KELEBEK VANA  
BUTTERFLY VALVE

KELEBEK VANA  
BUTTERFLY VALVE

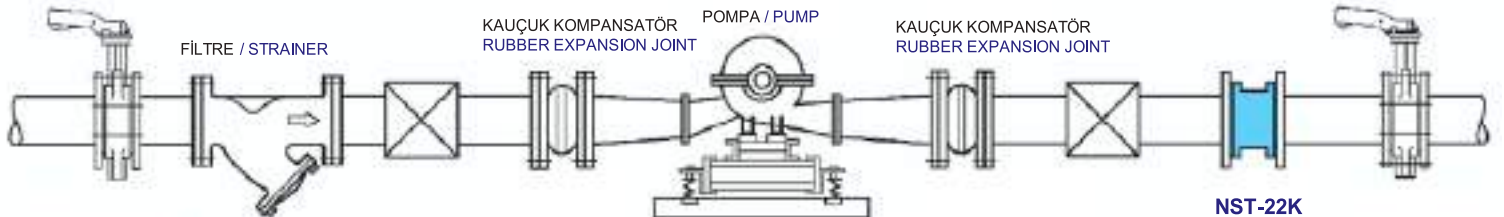

NST-22K