



MODEL NST-2C



AÇAMA BASINCI 0,03 Bar / OPENING PRESSURE 0,03 Bar

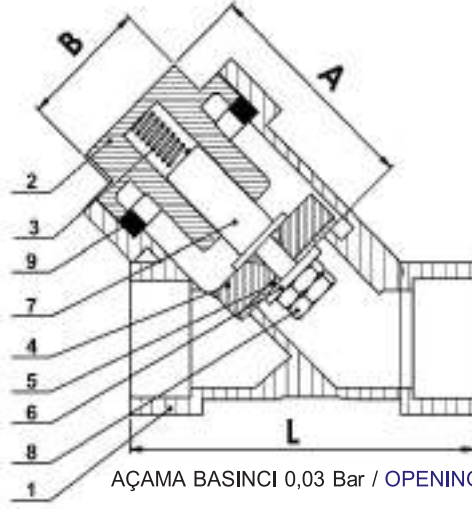

GÖVDENİN DEĞİŞİK SICAKLIKTAKİ DAYANMA BASINCI
PRESSURE RESISTANCE OF THE VALVE AT DIFFERENT TEMPERATURES

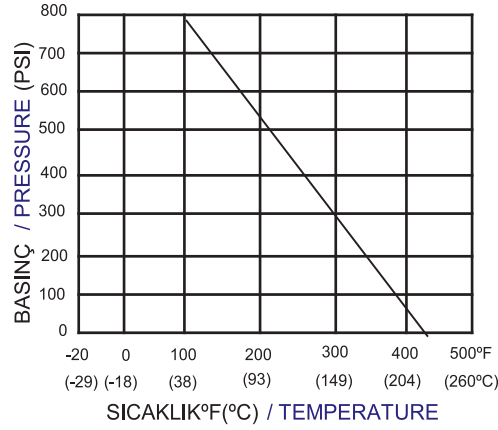

NO	PARÇA ADI / PART NAME	MALZEME / MATERIAL	MİKTAR / QTY
1	GÖVDE / BODY	PASLANMAZ ÇELİK / ASTM A351 GR.CF8M,CF8	1
2	KEP / CAP	PASLANMAZ ÇELİK / ASTM A351 GR.CF8M,CF8	1
3	YAY / SPRING	PASLANMAZ ÇELİK / SS304	1
4	KLAPE / FLAP	PASLANMAZ ÇELİK / SS316	1
5	SİT / SEAT	PTFE	1
6	PUL / WASHER	PASLANMAZ ÇELİK / SS304	1
7	MİL / SHAFT	PASLANMAZ ÇELİK / SS304	1
8	SOMUN / NUT	PASLANMAZ ÇELİK / SS304	1
9	KAPAK SIZDIRMAZLIK CONTASI / CAP SEALING GASKET	PTFE	2

ÖLÇÜ / SIZE (BSP)		L		A		B	
inch	mm	inch	mm	inch	mm	inch	mm
1/4"	8	2.56	65	1.81	46	0.75	19
3/8"	10	2.56	65	1.81	46	0.75	19
1/2"	15	2.56	65	1.81	46	0.75	19
3/4"	20	3.15	80	2.28	58	0.91	23
1"	25	3.54	90	2.72	69	1.06	27
1 1/4"	32	4.13	105	2.95	75	1.26	32
1 1/2"	40	4.72	120	3.35	85	1.61	41
2"	50	5.51	140	3.86	98	1.97	50