
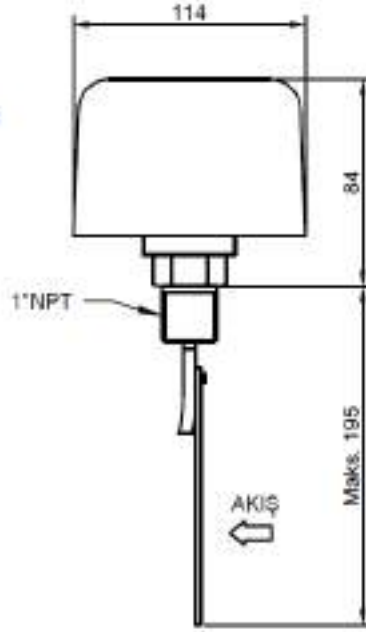


MODEL NST-AK12

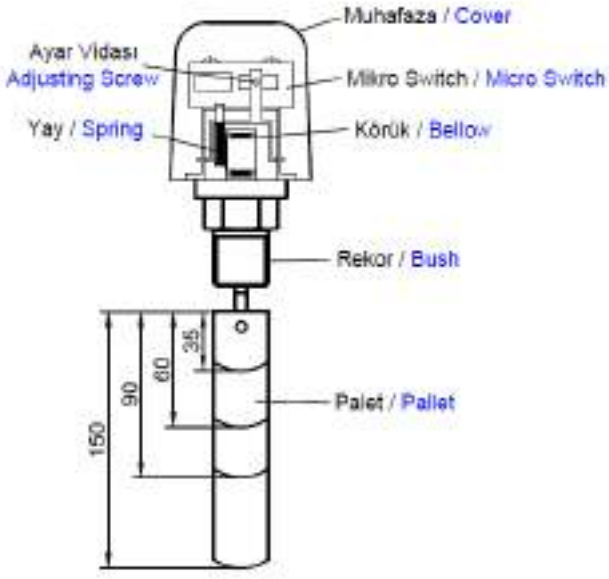

KULLANIM ÖZELLİKLERİ / USAGE PROPERTIES

AKIŞKAN SICAKLIĞI / FLUID TEMPERATURE	100° C
ORTAM SICAKLIĞI / AMBIENT TEMPERATURE	-40° C...+85° C
ELEKTRİK BESLEMESİ / ELECTRIC FEED	24 -250 VA, 15 (8) A
KONTAK / IGNITION	MECHANICAL MICRO SWITCH , SINGEL POLE , DOUBLE WAY
MAX.ÇALIŞMA SICAKLIĞI MAX OPERATING PRESSURE	10 bar
BASINÇ KAYBI / LOSS OF PRESSURE	APPROXIMATELY 0,01....0,03 bar
KORUMA SINIFI / PROTECTION CLASS	IP65
KULLANILDIĞI BORU ÇAPI / PIPE SIZE	THERE ARE PEDALS THAT SIZES FROM 1''' TO 8''' AND IT CAN ADJUST ACCORDING TO PIPE DIAMETER.
BAĞLANTI / CONNECTION	R1"
GÖVDE / BODY	St 37
PLAKALAR / PLATES	SS304
AZAMİ BASINÇ / MAX.PRESSURE	PN16