




1-DESIGN BY ASME B16.34
2-RF FLANGED END TO ANSI B16.5
3-FACE TO FACE BY ASME B16.10
4-TEST&INSPECT BY API598

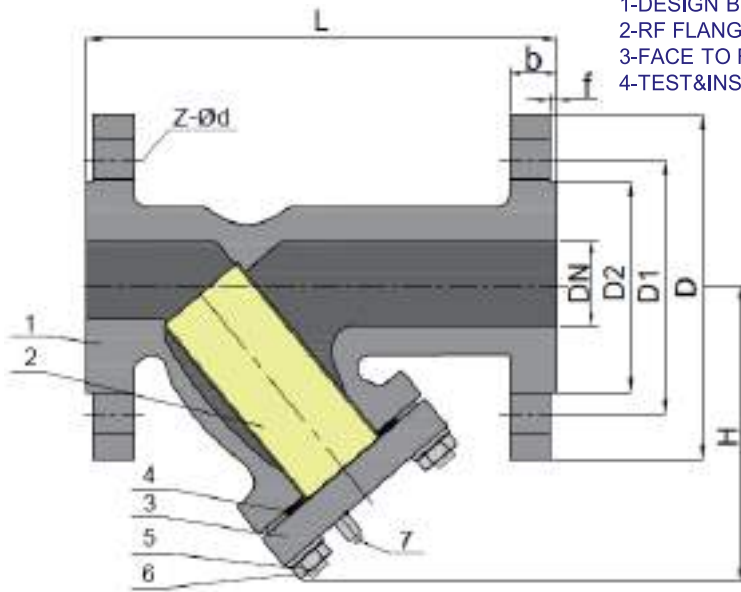

MALZEME / MATERIAL

1	GÖVDE / BODY	A216-WCB
2	FİLTRE / FILTER	PASLANMAZ ÇELİK / SS304
3	KAPAK / COVER	A216-WCB
4	CONTA / GASKET	ESNEK GRAFİT-304 / FLEXIBLE GRAHITE-304
5	HEX.CİVATA / HEX NUT	A194 Gr-2H
6	SOMUN / NUT	A193 Gr-B7
7	KÖR TAPA / BLIND PLUG	KARBON ÇELİK / CARBON STEEL

CL150 RF	ÖLÇÜ SIZE DN	L	~H	D	D1	D2	b	f	Z-Ød	AĞIRLIK / WEIGHT KGS
	DN50	203	-	152	120,5	92	16	2	4-19	
	DN65	216	-	178	139,5	105	17,5	2	4-19	
	DN80	241	-	190	152,5	127	19	2	4-19	
	DN100	292	-	229	190,5	157	24	2	8-19	
	DN125	355,6	-	254	216	185,7	24	2	8-22	
	DN150	406,4	-	279	241,3	216	25,5	2	8-22	
	DN200	495	-	343	298,5	270	28,5	2	6-22	