


AKTÜATÖRLÜ TANK DİP BOŞALMA VANASI FLUSH TANK BOTTOM VALVE WITH ACTUATOR

MODEL NST-DPBV2

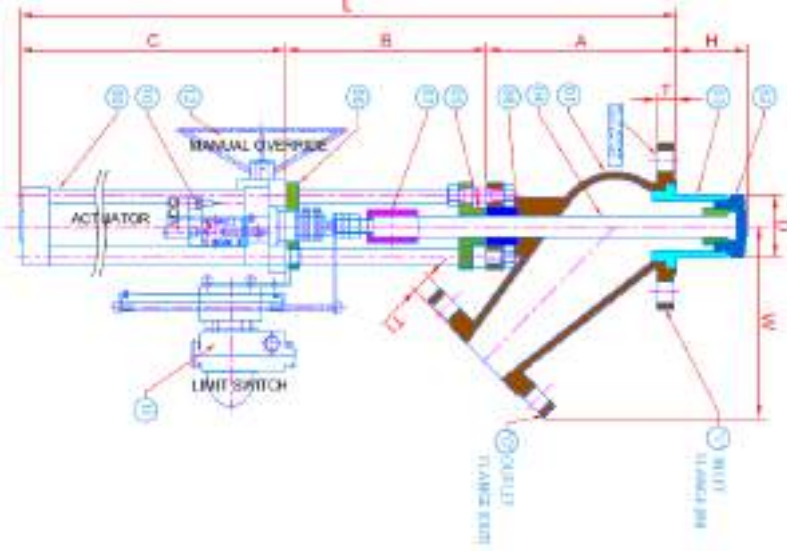

ANA SERVİS ORANI VE TEST BASINCI / PRIMARY SERVICE RATING & TEST PRESSURE

SINIF / CLASS	ÇALIŞMA BASINCI / WORKING PRESS.	HYD. TEST PRESSURE		
		GÖVDE / BODY	SİT / SEAT	SICAKLIK / TEMP.
150	10 Bar	16 Bar	10 Bar	180 °C
HAVA TESTİ – SİT / AIR TEST-SEAT 6 PSING ± 1 Bar				
TEKNİK VERİ / TECHNICAL DATA				
TASARIM VE ÜRETİM STANDARTI / DESIGN & MANUFACTURING STD.		ÜRETİCİNİN STANDARTI / MANUFACTURER'S STD. / ANSI B-16.34		
TEST VE MUAYENE STANDARTI / TESTING & INSPECTION STD		API 598		
BAĞLANTILAR / END CONNECTIONS		FLANŞLI / FLANGED AS PER ANSI B-16.5 CLASS-150#		

NO	AÇIKLAMA / DESCRIPTION	MALZEME / MATERIAL
1	GÖVDE / BODY	ASTM A216 WCB, ASTM A351 / CF8 / CF8M / CF3 / CF3M / CN7M
2	DİSK / DISC	ASTM A216 WCB, ASTM A351 / CF8 / CF8M / CF3 / CF3M / CN7M
3	SİT / SEAT	ASTM A216 WCB, ASTM A351 / CF8 / CF8M / CF3 / CF3M / CN7M
4	MİL / SHAFT	AISI 304 / 316 / 304L / 316L / A20
5	SALMASTRA KOVANI / GLAND	AISI 304
6	BOYUNLUK BURÇ GÖVDESİ / YOKE BUSH HOUSING	AISI 304
7	OTURMA AYAGI / COUPER	M.S. / SS304
8	KOVAN SALMASTRASI / GLAND PACKING	PTFE / GF / CF / PTFE / GRAPHOIL
9	PNÖMATİK SİLİNDİR / PNEUMATIC CYLINDER	ALUMINIUM DIE CAST BODY S/A OR D/A
10	VALF / VALVE	ALÜMİNYUM DIE CAST BODY 3/2 WAY OR 5/2 WAY
11	LİMİT SWİTCH / LIMIT SWITCH	ALÜMİNYUM / ALUMINIUM
12	VOLAN / MANUEL OVER RIDE	CI BODY

TANK BOŞALTMA VANASI FLANŞLI , DİSKİ TANK 'A AÇILAN 45° (DERECE) AKTÜATÖRLÜ

FLUSH TANK BOTTOM VALVE FLANGE END DISC OPENING INTO THE TANK 45° (DEGREE) WITH ACTUATOR

ÖLÇÜ / SIZE		APPROX L=A+B+C	H	D	APPROX W	FLANŞ BOYUTLARI / FLANGE DIMENSIONS				FLANŞ BOYUTLARI / FLANGE DIMENSIONS			
IN	OUT					A	B	C	I	T	O	T1	
DN20	DN20	MÜŞTERİ TARAFINDAN BELİRLENECEKTİR TO BE SPECIFIED BY CUSTOMER	MÜŞTERİ TARAFINDAN BELİRLENECEKTİR TO BE SPECIFIED BY CUSTOMER	MÜŞTERİ TARAFINDAN BELİRLENECEKTİR TO BE SPECIFIED BY CUSTOMER	138	133			AS PER 3/4" NB ASA 150#	11	AS PER 3/4" NB ASA 150#	11	
DN25	DN20				138	133			AS PER 1" NB ASA 150#	11	AS PER 3/4" NB ASA 150#	11	
DN25	DN25				138	133			AS PER 1" NB ASA 150#	11	AS PER 1" NB ASA 150#	11	
DN40	DN25				138	133			AS PER 1 1/2" NB ASA 150#	14	AS PER 1" NB ASA 150#	11	
DN40	DN40				156	148			AS PER 1 1/2" NB ASA 150#	14	AS PER 1 1/2" NB ASA 150#	14	
DN50	DN40				156	148			AS PER 2" NB ASA 150#	16	AS PER 1 1/2" NB ASA 150#	14	
DN50	DN50				176	160			AS PER 2" NB ASA 150#	16	AS PER 2" NB ASA 150#	16	
DN80	DN50				176	203			AS PER 3" NB ASA 150#	19	AS PER 2" NB ASA 150#	16	
DN80	DN80				218	203			AS PER 3" NB ASA 150#	19	AS PER 3" NB ASA 150#	19	
DN100	DN80				218	267			AS PER 4" NB ASA 150#	24	AS PER 3" NB ASA 150#	19	
DN100	DN100				252	267			AS PER 4" NB ASA 150#	24	AS PER 4" NB ASA 150#	24	
DN150	DN100				260	267			AS PER 6" NB ASA 150#	25	AS PER 4" NB ASA 150#	24	
DN150	DN150				321	388			AS PER 6" NB ASA 150#	25	AS PER 6" NB ASA 150#	25	
DN200	DN150				321	388			AS PER 8" NB ASA 150#	28	AS PER 6" NB ASA 150#	25	
DN200	DN200				375	475			AS PER 8" NB ASA 150#	28	AS PER 8" NB ASA 150#	28	

PNÖSAN San ve Tic. Ltd. Şti.

Merkez : Cemaliye Mah. Gazi Çeşme Sok. No: 2/A 59860 Çorlu / TEKİRDAĞ

Tel: (+90 282) 652 94 86 Pbx Fax: (+90 282) 652 74 05

Fabrika : Zafer Mah. Bakım Onarım 6. Sk. No: 54-55-56 Çorlu / TEKİRDAĞ

www.pnosan.com.tr / bilgi@pnosan.com.tr / satis@pnosan.com.tr