



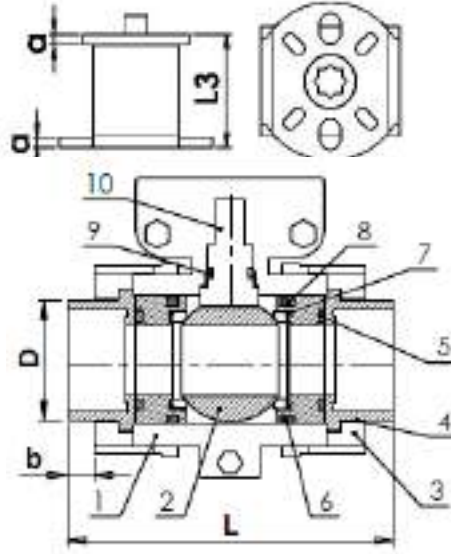

MODEL NST-EPPA

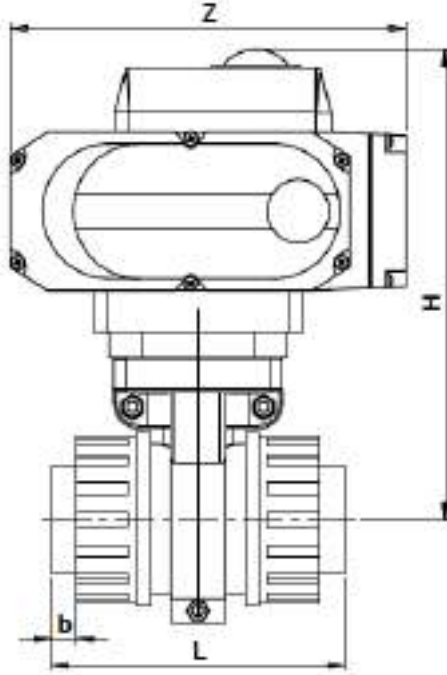

MALZEME LİSTESİ / MATERIAL LIST

NO	PARÇA ADI COMPONENT NAME	ADET pcs	SU TİPİ Water Type	ASİT TİPİ Acid Type
1	GÖVDE / BODY	1	UPVC	UPVC
2	KÜRE / BALL	1	UPVC	UPVC
3	KAPAK / BONNET	2	UPVC	UPVC
4	DİŞLİ YUVASI / THREAD HAUSING	2	PTFE	PTFE
5	DİŞLİ YUVASI CONTASI THREAD HOUSING GASKET	1	UPVC	UPVC
6	KAPAK CONTASI / BONNET GASKET	2	UPVC	UPVC
7	KAPAK İÇ O-RİNGİ BONNET SIDE O-RING	2	UPVC	UPVC
8	KAPAK DİŞ O-RİNGİ BONNET E XTERNAL O-RING	2	EPDM	VİTON
9	MİL O-RİNGİ / SHAFT O-RING	2	EPDM	VİTON
10	MİL / SHAFT	1	UPVC	UPVC

ÜRÜN AÇIKLAMASI / PRODUCT DESCRIPTION

NST-EPPA Soket Kaynaklı, PVC Gövdeli, Asit ve Su Tipi Küresel Vanalar
Nordsteam **NST-EPPA** Serisi PVC gövdeli küresel vanalar, soket kaynaklı yada dişli tip montajları ile su, asitler, alkali ve tuzlu sularda kullanıma uygundur. Standart PTFE küre contalı vanalar su hatları için EPDM, asit hatlarında kullanım için FKM (Viton) O-ring li olarak üretilmektedir. ISO5211 tepe flanşlı vanalar direkt pnömatik ve elektrikli aktüatör montajına uygundur. Küre, vananın montaj esnasında boru hattına aşırı sıkışmasından veya zorlanmasından etkilenmeyen ve aktüatörde zorlanmaya neden olmayan özel kilitleme sistemine sahiptir. Özel kol küre kilitleme sisteminin açılmasında anahtar olarak kullanılmaktadır.

NST-EPPA Socket Weld, PVC Bodied, Acid and Water Type, Ball Valves
Nordsteam **NST-EPPA** series PVC bodied ball valves, with their socket weld or thread type installations are suitable to use in water, acids and the water including alkali and salt. Standart PTFE Ball Valves are produced with EPDM for water installations, with FKM (Viton) O-ring for acid installations. ISO5211 top pad valves are fit to install pneumatic and electrical actuators. The ball has a special locking system not to be effected by the over compacting and constraining in the pipe-line and not to cause actuator to get constrained. The special handle is used as a key to unlock the ball locking system.

ÖLÇÜ / SIZE BSP	L	b	D	H	Z	L3	a	CXC	TEPE FLANŞLI TOP PAD ISO5211	TORK TORQUE Nm	AKTÜATÖR ACTUATOR
1/2"	100	15	15		160	28	6	9*9	F04	15	NST-EA05
3/4"	120	17	20		160	28	6	9*9	F04	21	NST-EA05
1"	135	20	25		160	50	7	11*11	F03-F05	24	NST-EA05
1 1/4"	150	23	32		160	50	7	11*11	F03-F05	33	NST-EA05
1 1/2"	170	25	40		160	50	8	14*14	F05	40	NST-EA05
2"	200	28	50		196	50	8	14*14	F05	52	NST-EA10
2 1/2"	215	32	65		196	70	10-12	17*17	F07-F10	90	NST-EA10
3"	265	35	80		256						NST-EA20
4"	360	45	100		256						NST-EA20

PNÖSAN San ve Tic. Ltd. Şti.

Merkez : Cemaliye Mah. Gazi Çeşme Sok. No: 2/A 59860 Çorlu / TEKİRDAĞ

Tel: (+90 282) 652 94 86 Pbx Fax: (+90 282) 652 74 05

Fabrika : Zafer Mah. Bakım Onarım 6. Sk. No: 54-55-56 Çorlu / TEKİRDAĞ

www.pnosan.com.tr / bilgi@pnosan.com.tr / satis@pnosan.com.tr