


LUG TİPİ ELEKTRİK AKTÜATÖRLÜ PTFE KELEBEK VANALAR LUG TYPE PTFE BUTTERFLY VALVES WITH ELECTRIC ACTUATOR

MODEL NST-EAKLT2

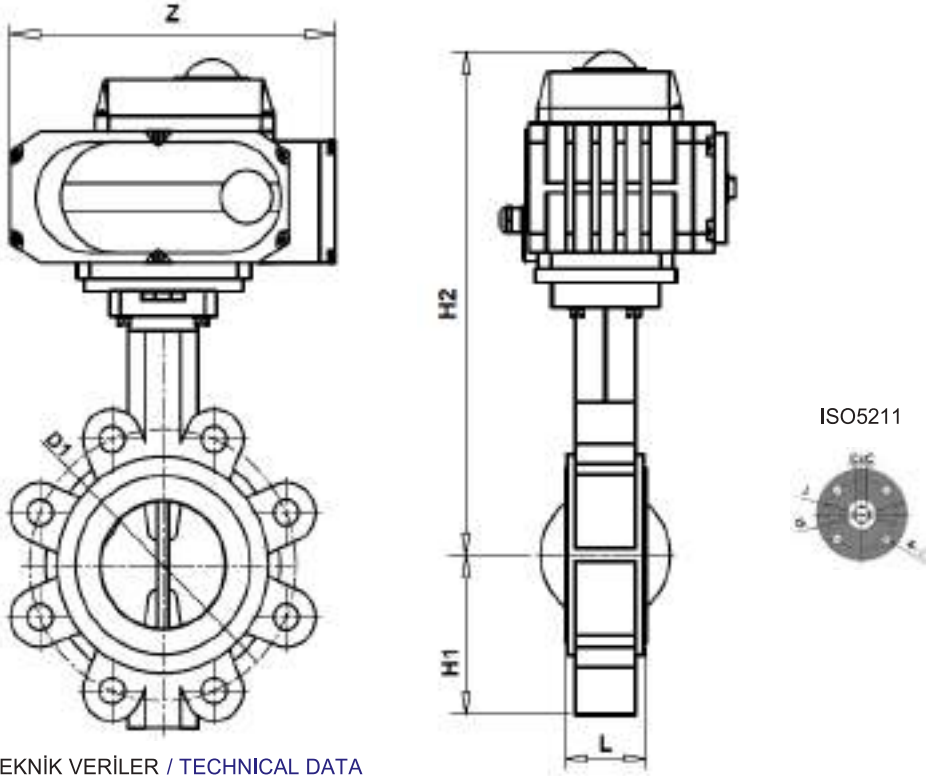

TEKNİK VERİLER / TECHNICAL DATA

ÇEVRE SICAKLIĞI / AMBIENT TEMP : -10~+60°C

NOMİNAL BASINÇ / NOMINAL PRESSURE : 0~1.0 Mpa

KONTROL VOLTAJİ / CONTROL VOLTAGE : AC110V, AC220V, AC380V, DC24V

EBAT / SIZE : DN50-DN300

KONTROL TARZI : ON-OFF, AYARLANABİLİR / CONTROL WAY : ON-OFF TYPE, ADJUSTABLE TYPE

SİPARİŞ ESNASINDA BELİRTİLMESİ DURUMUNDA ORANSAL AYARLANABİLİR

IT CAN BE SET AS PROPORTIONAL IF REQUESTED DURING ORDER



ELEKTRİK AKTÜATÖRLÜ PTFE KELEBEK VANA / PTFE BUTTERFLY VALVE WITH ELECTRIC ACTUATOR

ÖLÇÜ / SIZE	L	H1	H2	Z	D1	N-Ø	CXC	G	J	4-Ø	AKTÜATÖR ACTUATOR
DN50	43	88	228,5	160	125	4-M16	9*9	65	50	4-Ø7	NST-EA05
DN65	46	89	249,5	160	145	4-M16	9*9	65	50	4-Ø7	NST-EA05
DN80	46	95	265,5	160	160	8-M16	9*9	65	50	4-Ø7	NST-EA05
DN100	52	114	302,5	196	180	8-M16	11*11	65	50	4-Ø7	NST-EA10
DN125	56	127	314,5	196	210	8-M16	14*14	90	70	4-Ø9	NST-EA10
DN150	56	139	370,5	256	240	8-M20	14*14	90	70	4-Ø9	NST-EA20
DN200	60	175	398	256	295	12-M20	17*17	125	70	4-Ø12	NST-EA20
DN250	68	205	455	256	355	12-M22	22*22	125	70	4-Ø12	NST-EA40
DN300	78	235	592	256	410	12-M22	22*22	150	102	4-Ø14	NST-EA60

PNÖSAN San ve Tic. Ltd. Şti.

Merkez : Cemaliye Mah. Gazi Çeşme Sok. No: 2/A 59860 Çorlu / TEKİRDAĞ

Tel: (+90 282) 652 94 86 Pbx Fax: (+90 282) 652 74 05

Fabrika : Zafer Mah. Bakım Onarım 6. Sk. No: 54-55-56 Çorlu / TEKİRDAĞ

www.pnosan.com.tr / bilgi@pnosan.com.tr / satis@pnosan.com.tr