


MODEL NST-EKW2

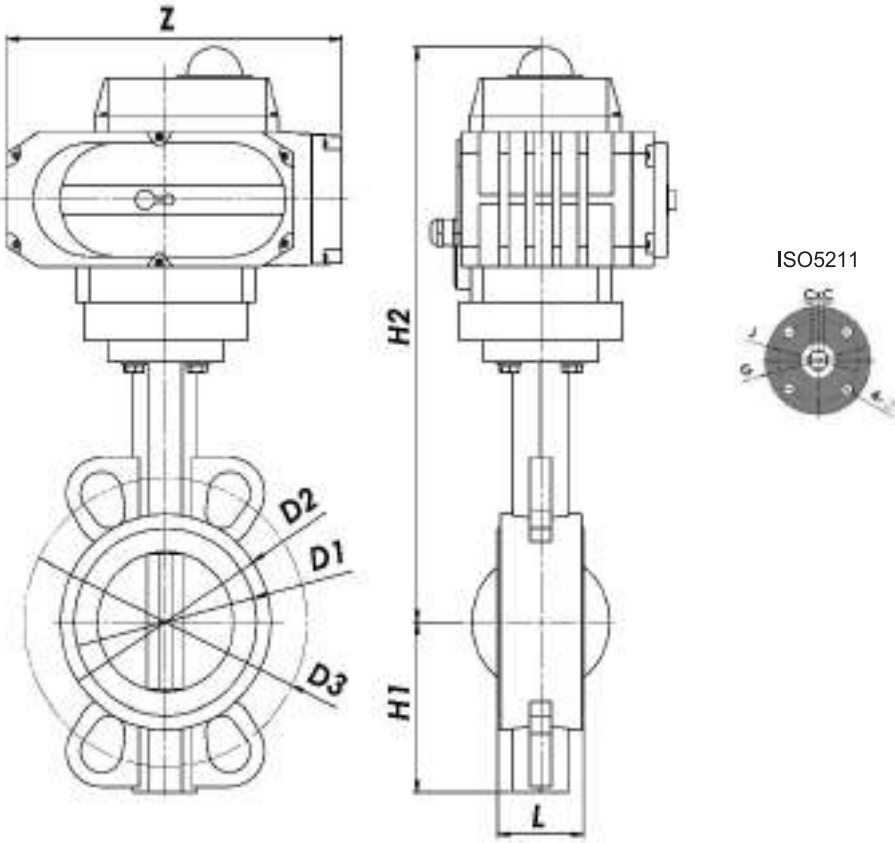

TEKNİK VERİLER / TECHNICAL DATA

ÇEVRE SICAKLIĞI / AMBIENT TEMP : -10~+60°C

NOMİNAL BASINÇ / NOMINAL PRESSURE : 0~1.0 Mpa

KONTROL VOLTAJİ / CONTROL VOLTAGE : AC110V, AC220V, AC380V, DC24V

EBAT / SIZE : DN50-DN300

KONTROL TARZI : ON-OFF, AYARLANABİLİR / CONTROL WAY : ON-OFF TYPE, ADJUSTABLE TYPE

SİPARİŞ ESNASINDA BELİRTİLMESİ DURUMUNDA ORANSAL AYARLANABİLİR

IT CAN BE SET AS PROPORTIONAL IF REQUESTED DURING ORDER

ELEKTRİK AKTÜATÖRLÜ WAFER KELEBEK VANA / WAFER BUTTERFLY VALVE WITH ELECTRICAL ACTUATOR

ÖLÇÜ / SIZE	L	H1	H2	Z	D1	D2	D3	CXC	G	J	4-Ø	AKTÜATÖR ACTUATOR
DN50	43	77	292	160	70	118	125	9*9	65	50	4-Ø7	NST-EA05
DN65	46	87,5	303	160	85	137	145	9*9	65	50	4-Ø7	NST-EA05
DN80	46	95	342	196	100	143	160	9*9	65	50	4-Ø7	NST-EA10
DN100	52	107	353	196	122	156	180	11*11	65	50	4-Ø7	NST-EA10
DN125	55	121,5	400	256	148	190	210	14*14	90	70	4-Ø9	NST-EA20
DN150	56	144	419	256	175	212	240	14*14	90	70	4-Ø9	NST-EA20
DN200	60	171	447	256	226	268	295	17*17	125	70	4-Ø12	NST-EA40
DN250	68	205	479	256	278	325	350	22*22	125	70	4-Ø12	NST-EA40
DN300	78	235	555	256	330	403	400	22*22	150	102	4-Ø14	NST-EA60

OPSİYONEL : SATIŞ DANIŞMANIMIZDAN ORANSAL MODELİMİZ HAKKINDA BİLGİ ALABİLİRSİNİZ.
OPTIONAL : YOU CAN GET INFORMATION ABOUT OUR PROPORTIONAL MODAL FROM SALES RESPONSIBLES.