
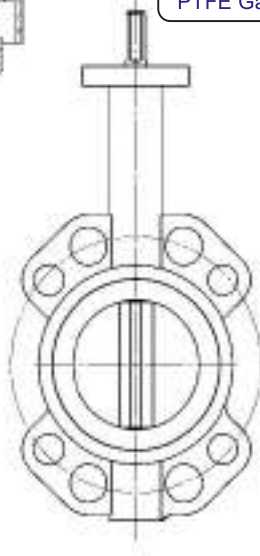


PTFE CONTALI WAFER TİPİ KELEBEK VANALAR
PTFE GASKET WAFER TYPE BUTTERFLY VALVES

PTFE Contalı AISI316 Diskli Kelebek Vana
 PTFE Gasket, Butterfly Valve with AISI316 disc

MODEL NST-WT2

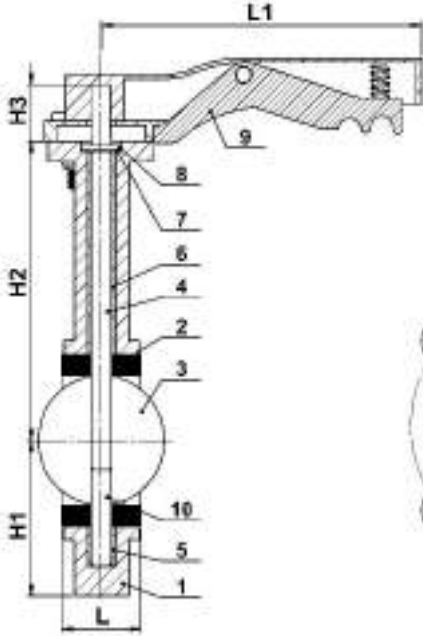

ISO5211



BASINÇ SINIFI / PRESSURE CLASS	MAX 16 BAR
FARK BASINCI DIFFERENTIAL PRESSURE	ΔP 16 BAR
MAX.ÇALIŞMA SICAKLIĞI (TMO) MAX.OPERATING TEMPERATURE	180 °C
VAKUM VACUUM	MAX 0.2 BAR MUTLAK BASINÇ / ABSOLUTE PRESSURE

NO	PARÇA ADI / PART NAME	MALZEME / MATERIAL
1	GÖVDE / BODY	SFERO DÖKÜM / GGG40 SPHERO CAST
2	SİT / SEAT	PTFE + SILICON
3	DİSK / DISC	PASLANMAZ ÇELİK / AISI316 STAINLESS STEEL
4	MİL / SHAFT	PASLANMAZ ÇELİK / SS416~316
5	ALT YATAKLAMA / LOWER BEARING	EPDM
6	ÜST YATAKLAMA / UPPER BEARING	EPDM
7	PUL / WASHER	A3
8	SEGMAN / SEGMENT	A3
9	KOL / HANDLE	ALÜMİNYUM / ALUMINIUM
10	KISA MİL / SHORT SHAFT	PASLANMAZ ÇELİK / SS416~316

ÖLÇÜ / SIZE	L	H1	H2	H3	L1	G	J	CXC	4*Ø	AĞIRLIK / WEIGHT KGS
DN50	43	80	161	32	198	65	50	9*9	4-7	3.00
DN65	46	89	175	32	198	65	50	9*9	4-7	3.70
DN80	46	95	181	32	198	65	50	11*11	4-7	4.10
DN100	52	114	200	32	210	90	50	11*11	4-10	5.40
DN125	55	127	213	32	272	90	70	14*14	4-10	7.80
DN150	56	139	226	32	272	90	70	14*14	4-10	8.60
DN200	60	175	260	35	358	125	70	17*17	4-12	14.50
DN250	68	203	292	35	358	125	70	22*22	4-12	22.00
DN300	78	242	337	35	358	125	102	22*22	4-12	36.50
DN350	78	267	368	45		125	125	22*22	4-12	60.50
DN400	102	309	400	51		175		27*27	4-18	82.00